



## Striking Visuals & Increased Productivity **DE7200**


Accelerated performance for your most demanding tasks. The DE7200 allows you to run the most advanced software seamlessly and helps you create an immersive digital experience with powerful built-in visual enhancements. Integrating the latest 4th Generation Intel® Core™, the DE7200 raises the bar on computing.

The versatile design of the DE7200 provides:

- + Support for Extended Desktop on all connected screens for up to three independent (Full HD) displays.
- + Flexible integration opportunities thanks to a unique small form factor
- + High performance support for Ultra HD resolution (4k\*)
- + Power switch extension for remote control
- + Ultra reliable hardware with 24/7 operability
- + Energy efficient green computing

*\* 4k playback results may vary based on software, codecs and content being played*

# DE7200

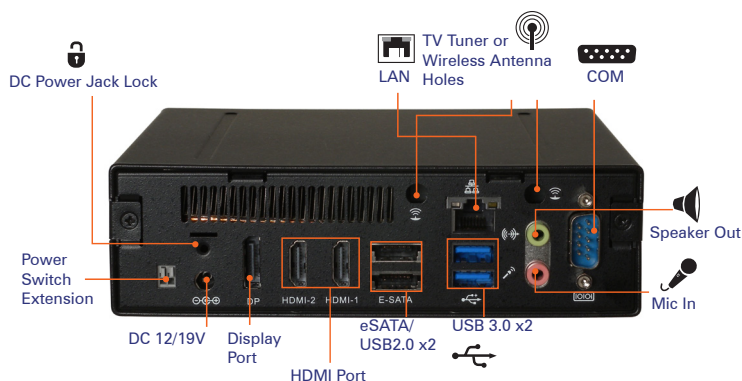

<b>Model name</b>		<b>DE7200</b>
<b>Feature</b>		Supports 4th generation Intel® Core™ vPro™ i3, i5, i7 mobile processor family
<b>Housing Material</b>		SECC t=0.8 mm
<b>Dimension</b>	W x H x D (mm)	166 x 48 x 157 mm
	W x H x D (inch)	6.54 x 1.89 x 6.18 inch
<b>Volume(liters)</b>		1.25L
<b>Weight(Kg/Pound)</b>		1.1 kgs / 2.42 lbs (N.W.)
<b>Form Factor</b>		mini-ATX
<b>CPU</b>	Socket	Socket G3/rPGA946B/947
	Type	Supports 4th generation Intel® Core™ vPro™ i3, i5, i7 mobile processor TDP≤47W
<b>Chipset</b>		Intel® QM87 Chipset
<b>Memory</b>	Channels	Dual Channel
	Type	DDRIII Low Voltage SO-DIMM x 2
	DDR	1333/1600
	Max Memory	16GB (depending on OS)
<b>Graphics</b>	Chip	Intel® HD Graphics 4600
	HDMI Port	x 2
	Display Port	x 1
<b>Audio</b>	Type	Realtek HD Audio Codec ALC269Q
	Channels	Stereo/5.1 CH with HDMI
<b>LAN</b>		Intel® Gigabit Ethernet WGI217LM 10/100/1000Mbps
<b>Expansion</b>	Mini Card Slot	Full size x 1, half size x 1
<b>Storage Bay</b>	SATA Connector	x 1 (2.5" SATA HDD)
	mSATA	x 1
<b>Security</b>	Trusted Platform Modules (TPM v1.2)	SLB9635TT1.2
	Kensington Lock Hole	x 1 (Rear)

<b>Front Panel IO</b>	<b>Power Button</b>	x 1	
	<b>HDD indicator (blue)</b>	x 1	
	<b>Power indicator (blue)</b>	x 1	
	<b>USB 2.0 Port</b>	x 2	
<b>Rear Panel IO</b>	<b>DC Jack</b>	x 1	
	<b>HDMI Port</b>	x 2	
	<b>Display Port</b>	x 1	
	<b>USB 2.0 Port</b>	x 2 (combined with eSATA)	
	<b>USB 3.0 Port</b>	x 2	
	<b>eSATA</b>	x 2	
	<b>RJ45 LAN Jack</b>	x 1	
	<b>Legacy RS232 Serial Port (COM Port)</b>	x 1	
	<b>Audio Set</b>	<b>Line-Out</b>	x 1
		<b>Mic-in</b>	x 1
<b>Antenna Hole</b>	x 2		
<b>DC Power Jack Lock</b>	x 1		
<b>CPU Thermal</b>	<b>Module</b>	AOPEN Thermal Module	
	<b>Noise (idle mode)</b>	27dB	
<b>WatchDog Timer</b>		1 ~ 255 SEC./min	
<b>Adapter</b>		90W (19/12V, 4.5A) AC Adapter	
<b>Input Voltage</b>		AC 100 ~ 240V/DC 12V/20V	
<b>Environment</b>			
<b>MTBF</b>	50,000hrs		
<b>Operating Temperature</b>	0 ~ 50°C (32 ~ 122°F)		
<b>Storage Temperature</b>	-30 ~ 60°C (-22 ~ 140°F)		
<b>Relative Humidity</b>	95% RH (50°C non-Condensing)		
<b>Operating Vibration</b>	0.5Gms, Random, 10 ~ 500Hz,X,Y,Z 3Axes, 0.5hr/Axis		
<b>Non-Operating Vibration</b>	2Gms, Random, 10 ~ 300Hz,X,Y,Z 3Axes, 1hr/Axis		
<b>Operating Shock</b>	8G, Half sine, 11ms duration		
<b>Non-Operating Shock</b>	50G, Half sine, 11ms duration		

Supports:



\*Accessories available on demand



The specifications depicted may be subject to change without prior notice. All trademarks are copyright of their respective owners. © AOPEN Inc.